

GI CROSS TEE

FALSE CEILING COMPONENT

GI Cross Tee is a secondary supporting member of the exposed T-grid suspended ceiling system. It interlocks with the Main Tee to form the modular grid that supports lay-in ceiling tiles. The profile is manufactured from galvanized steel with a pre-finished exposed flange for a clean ceiling appearance.

PRODUCT SPECIFICATIONS

Product	Cross Tee
Material	Cold-formed galvanized steel
Typical section size	600 × 600 mm / 600 × 1200 mm
Typical thickness	0.3 / 0.35 / 0.50 mm*
Standard length	600 mm / 1200 mm
Cross-section	Inverted T-section
Application	Exposed T-grid suspended ceiling system
Installation	Interlocked perpendicular to Main Tee

*Dimensions, thickness and coating mass may be supplied to project specification. Confirm the exact section and gauge against the approved INTACT product schedule before use.



MATERIALS & COATING

Protection	Hot-dip galvanized coating for corrosion resistance
Zinc coating	Z120, Z180 and Z275
Finish	Uniform metallic galvanized appearance, free from significant defects
Cut edges	Edges may be uncoated after cutting; handling and installation should avoid unnecessary damage



HIGH STRENGTH
& DURABILITY




CORROSION
RESISTANT



PRECISION
ENGINEERED



CONSISTENT QUALITY
& PERFORMANCE



FUNCTIONAL CHARACTERISTICS

- ✓ Connects perpendicular to the Main Tee to complete the suspended ceiling framework.
- ✓ Maintains consistent spacing for 600 × 600 mm and 600 × 1200 mm ceiling modules.
- ✓ Helps maintain grid alignment, squareness and a level ceiling surface.
- ✓ Lightweight profile and click-lock connection enable fast assembly and easy positioning.

KEY BENEFITS


- ✓ Excellent corrosion resistance
- ✓ Dimensionally accurate for easy installation
- ✓ Compatible with standard accessories
- ✓ Consistent quality and performance

AVAILABLE THICKNESS (mm)


- ✓ 0.30
- ✓ 0.35
- ✓ 0.50

*Other thickness available on request

INSTALLATION

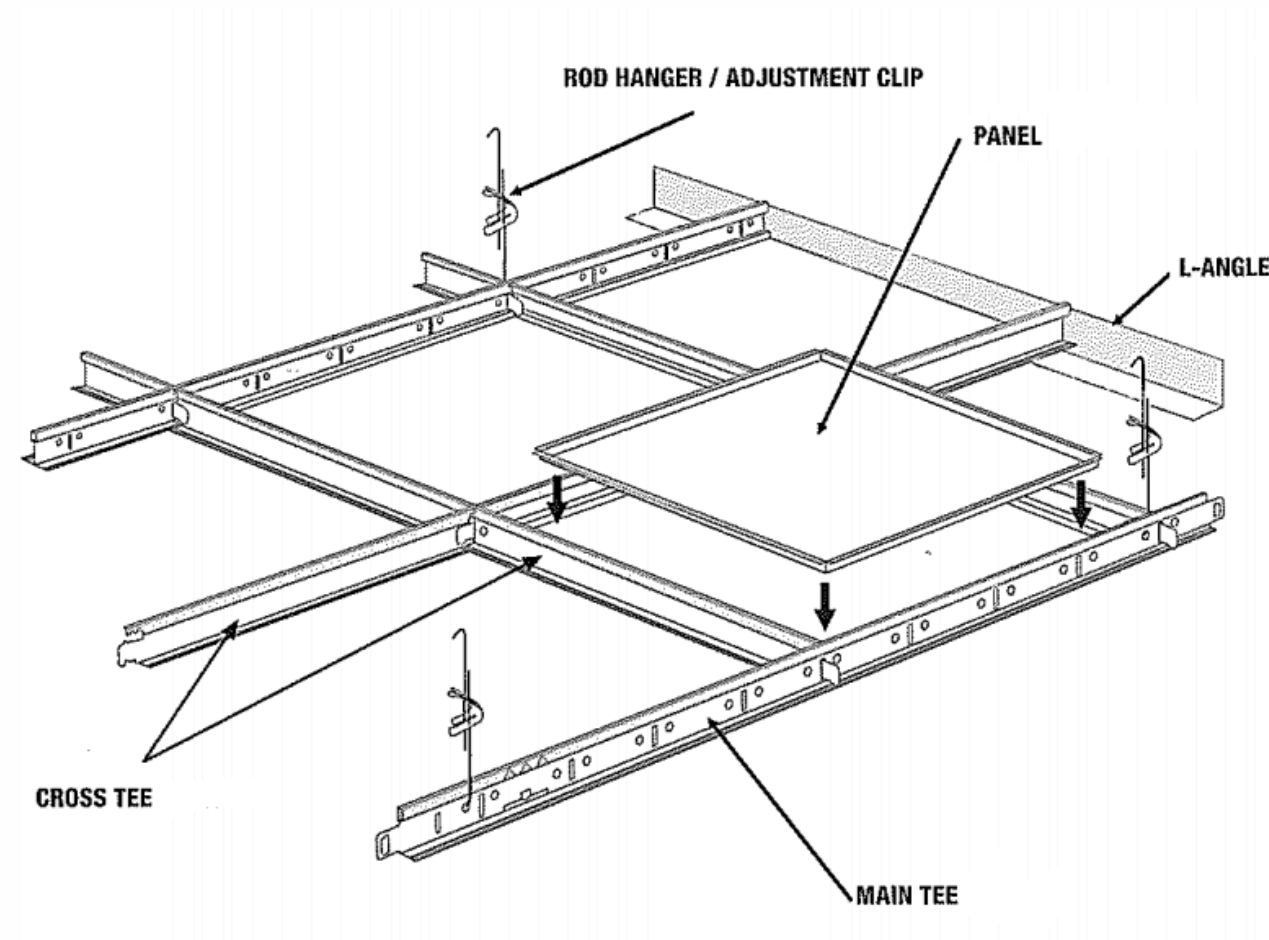

CROSS SECTION

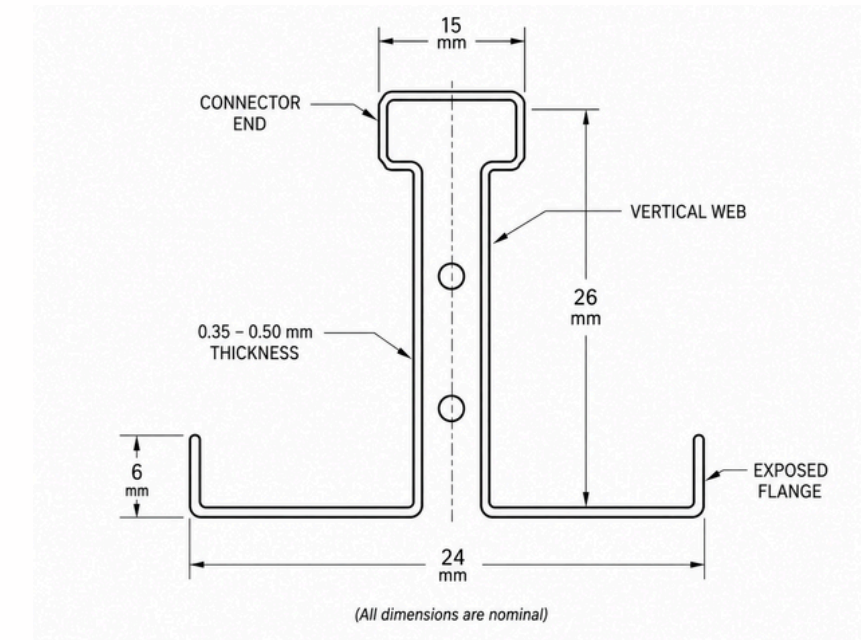

STORAGE & HANDLING

Store flat, supported and protected from standing water, excessive moisture and contamination. Keep bundles off the ground and avoid bending or twisting the profiles. Handle with care to prevent deformation and damage to the galvanized surface. Use appropriate gloves and safe lifting practices during handling.