

GI WALL ANGLE


GALVANIZED STEEL CEILING FRAMING COMPONENT

GI Wall Angle is a galvanized steel perimeter profile used as the supporting boundary for suspended gypsum ceiling systems. It is installed along the wall perimeter to provide a clean, stable and level edge for the ceiling framework.

PRODUCT SPECIFICATIONS

|                      |                                                                  |
|----------------------|------------------------------------------------------------------|
| Product              | GI Wall angle for gypsum ceilings                                |
| Material             | Cold-formed galvanized steel                                     |
| Typical section size | 25 × 25 mm*                                                      |
| Typical thickness    | 0.3 / 0.35 / 0.50 / 0.55 / 0.60 mm*                              |
| Standard length      | 3,000 mm*                                                        |
| Cross-section        | L shaped / Angle profile                                         |
| Application          | Provide a clean, stable and level edge for the ceiling framework |
| Installation         | Fixed to wall perimeter using suitable anchors/screws            |

\*Dimensions, thickness and coating mass may be supplied to project specification.  
Confirm the exact section and gauge against the approved INTACT product schedule before use.

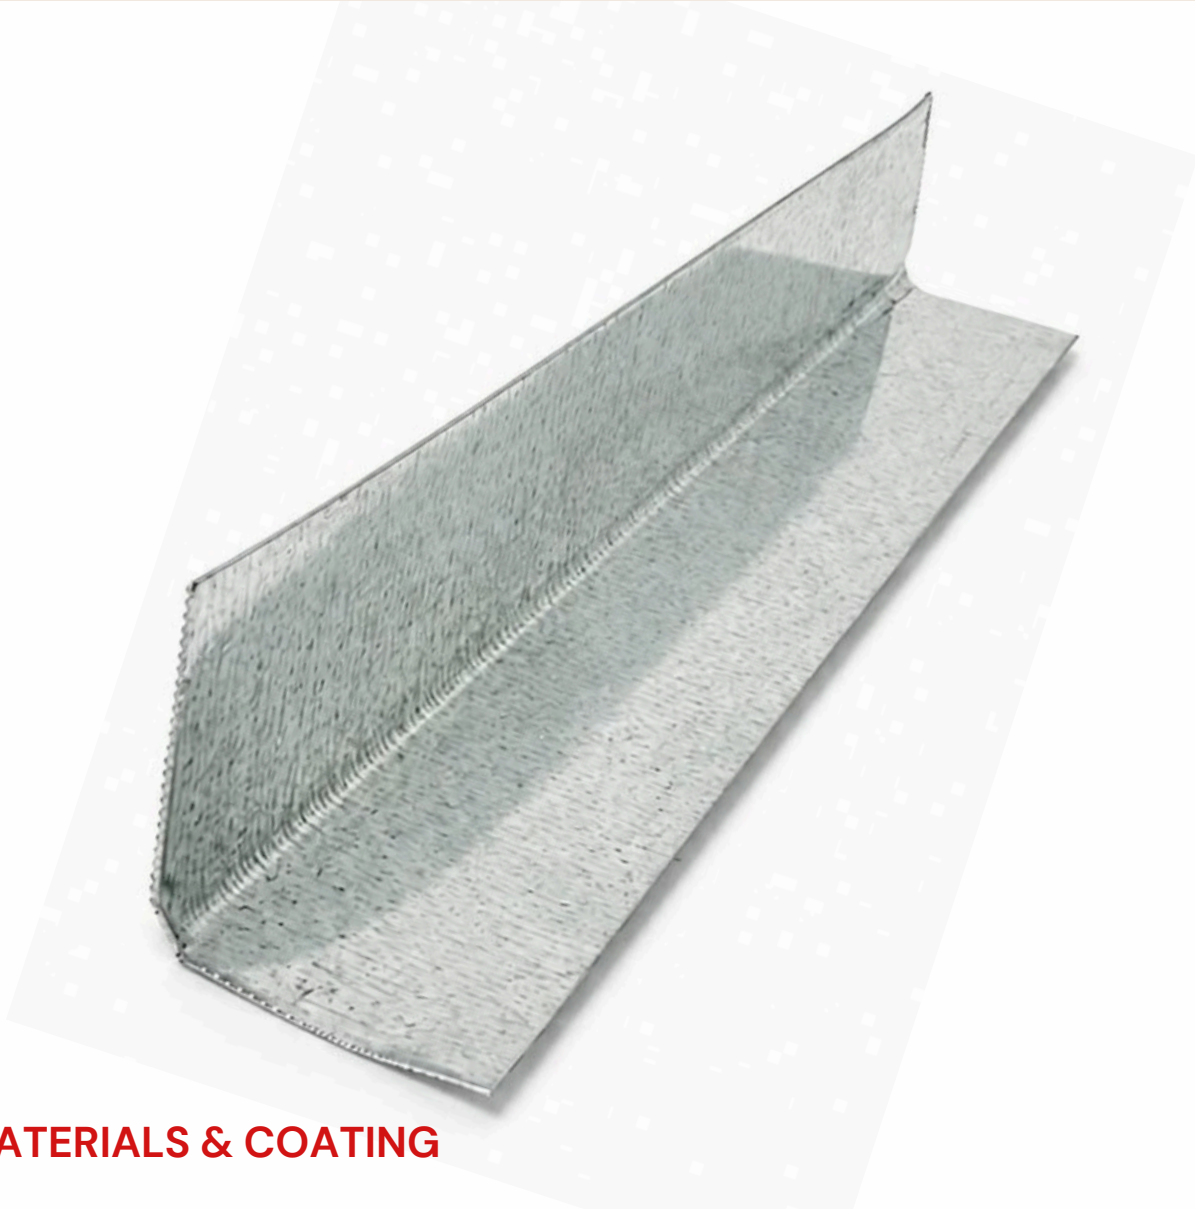

MATERIALS & COATING

|              |                                                                                                |
|--------------|------------------------------------------------------------------------------------------------|
| Protection   | Hot-dip galvanized coating for corrosion resistance                                            |
| Zinc coating | Z120, Z180 and Z275                                                                            |
| Finish       | Uniform metallic galvanized appearance, free from significant defects                          |
| Cut edges    | Edges may be uncoated after cutting; handling and installation should avoid unnecessary damage |



HIGH STRENGTH  
& DURABILITY




CORROSION  
RESISTANT



PRECISION  
ENGINEERED



CONSISTENT QUALITY  
& PERFORMANCE



## FUNCTIONAL CHARACTERISTICS

- ✓ Provide a clean, stable and level edge for the ceiling framework.
- ✓ Galvanized finish provides protection during normal indoor construction and service conditions.
- ✓ Cold-formed profile provides a high strength-to-weight ratio and consistent geometry.
- ✓ Suitable for fast installation with compatible INTACT ceiling framing components.

## KEY BENEFITS


- ✓ Excellent corrosion resistance
- ✓ Dimensionally accurate for easy installation
- ✓ Compatible with standard accesories
- ✓ Consistent quality and performance

## AVAILABLE THICKNESS (mm)


- ✓ 0.30
- ✓ 0.35
- ✓ 0.50

\*Other thickness available on request

## INSTALLATION

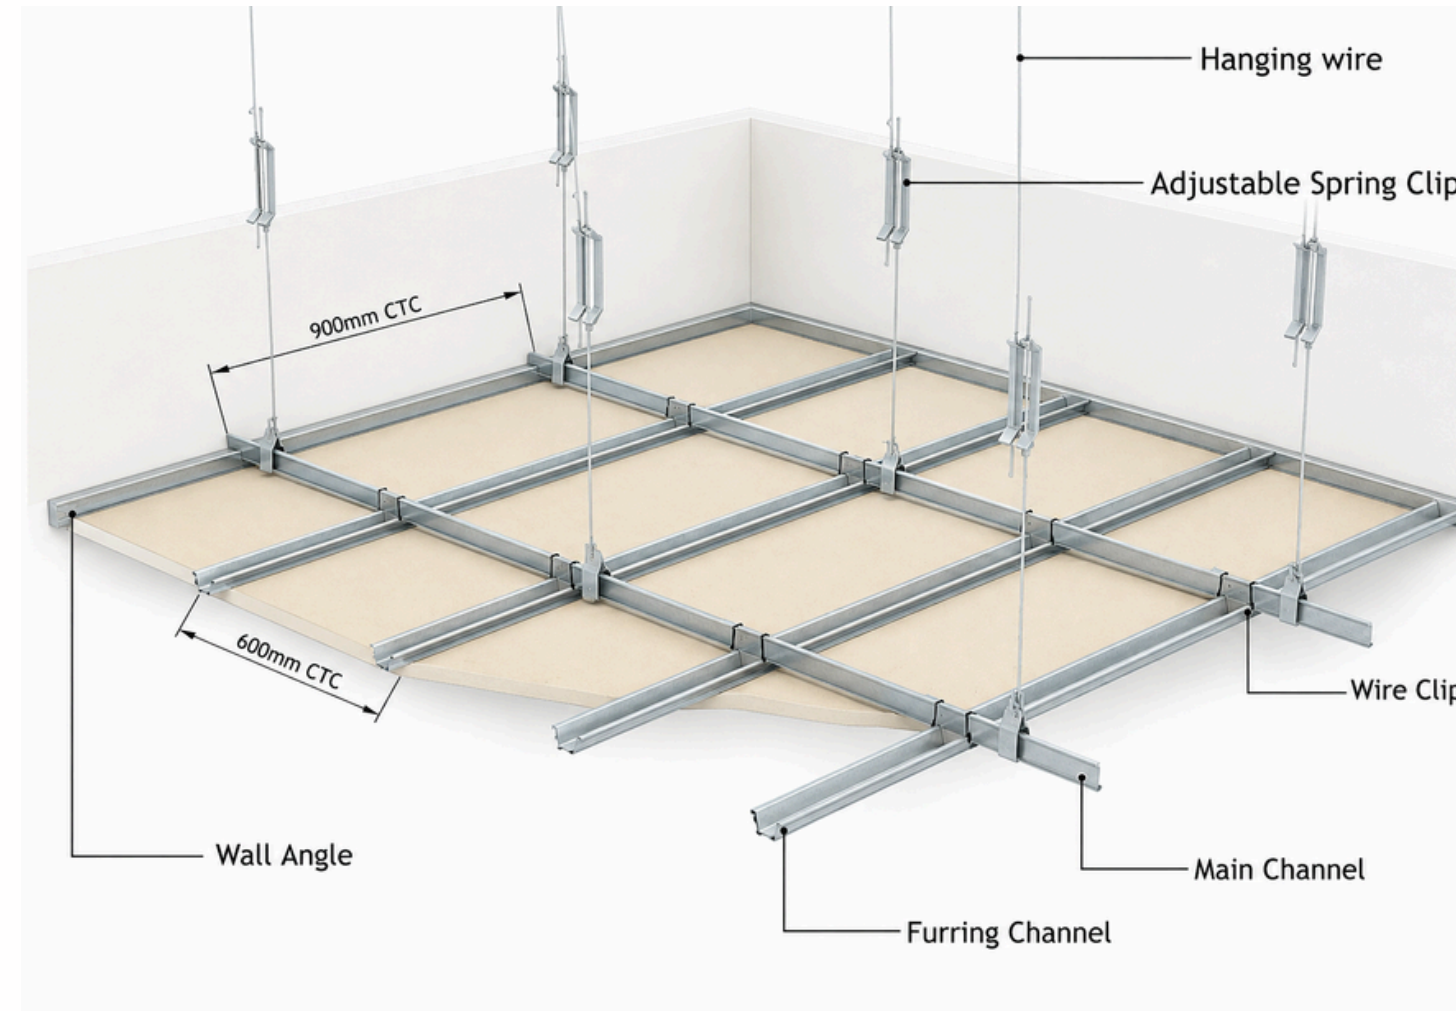

## CROSS SECTION

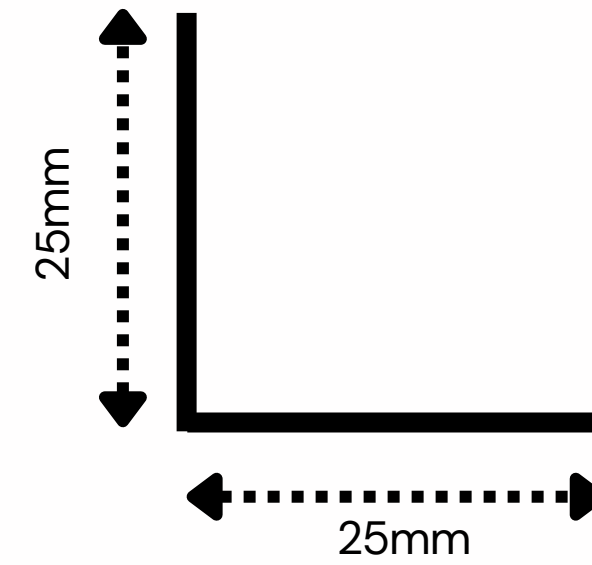

## STORAGE & HANDLING

Store flat, supported and protected from standing water, excessive moisture and contamination. Keep bundles off the ground and avoid bending or twisting the profiles.

Handle with care to prevent deformation and damage to the galvanized surface. Use appropriate gloves and safe lifting practices during handling.