



WALL MOUNT ACCESS PANEL


MAINTENANCE ACCESS COMPONENT

INTACT access panels are designed to provide convenient access to services installed above gypsum ceilings or behind drywall partitions. The panel integrates neatly with the surrounding surface and can be opened for inspection, maintenance and repair work.

PRODUCT SPECIFICATIONS

Product	Gypsum board access panel
Frame Material	Extruded aluminium profile stipulated to BSSN 755-9-2008
Board thickness	12.50 mm
Door infill	Moisture-resistant gypsum board *
Color	RAL 9016
Opening mechanism	Push open locks
Outer frame	60 mm high frame of 2mm thickness electro galvanized without powder coating
Inner frame	12mm thickness cement board with aluminium frame with powder coating finish.
Size	Customisable to any size
Application	Ideal for ceilings and dry wall maintenance in residential, commercial & industrial buildings.

*Board infill can be matched to project specification.
Confirm the exact size and shape against the approved INTACT product schedule before use.

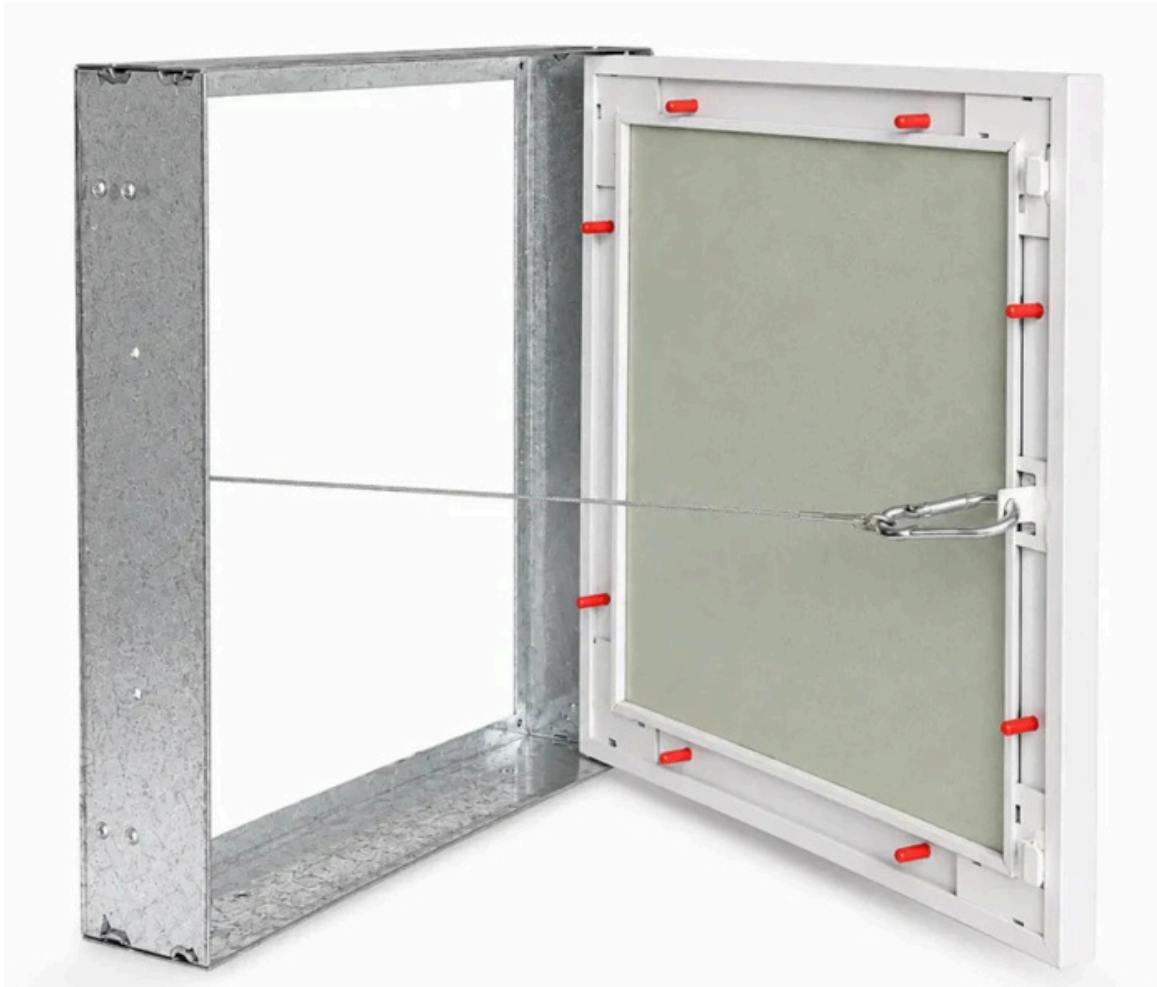

OTHER FEATURES

- ✓ White powder coated finish.
- ✓ 300 mm long safety cable with hook provided where applicable.
- ✓ High oxidation resistance, sound and dust proof.
- ✓ Lightweight aluminium frame provides strength and corrosion resistance.

AVAILABLE SIZES (mm)

- ✓ 200 × 200 mm
- ✓ 300 × 300 mm
- ✓ 400 × 400 mm
- ✓ 450 × 450 mm
- ✓ 500 × 500 mm
- ✓ 600 × 600 mm

*Other sizes available on request


HIGH STRENGTH
& DURABILITY


CORROSION
RESISTANT


PRECISION
ENGINEERED


CONSISTENT QUALITY
& PERFORMANCE